


Features

- S_{21} = 19.5 dB @ 400 MHz
= 18.5 dB @ 500 MHz
- NF of 1.1 dB over Frequency
- Unconditionally Stable
- Single 5V Supply
- High OIP3 @ Low Current

Description

The plerow™ ALN-series is the compactly designed surface-mount module for the use of the LNA with or without the following gain blocks in the infrastructure equipment of the mobile wireless (CDMA, GSM, PCS, PHS, WCDMA, DMB, WLAN, WiBro, WiMAX), GPS, satellite communication terminals, CATV and so on. It has an exceptional performance of low noise figure, high gain, high OIP3, and low bias current. The stability factor is always kept more than unity over the application band in order to ensure its unconditionally stable implementation to the application system environment. The surface-mount module package including the completed matching circuit and other components necessary just in case allows very simple and convenient implementation onto the system board in mass production level.



1-stage Single Type

Specifications (in Production)

Typ. @ T = 25°C, V_s = 5 V, Freq. = 450 MHz, $Z_{o,sys}$ = 50 ohm

Parameter	Unit	Specifications		
		Min	Typ	Max
Frequency Range	MHz	400		500
Gain	dB	18	19	
Gain Flatness	dB		± 0.4	± 0.5
Noise Figure	dB		1.1	1.2
Output IP3 ⁽¹⁾	dBm	26	29	
S11 / S22 ⁽²⁾	dB			-16 / -14
Output P1dB	dBm	20	22	
Switching Time	µsec		-	
Supply Current	mA		35	50
Supply Voltage	V		5	
Impedance	Ω		50	
Package Type & Size	mm	Surface Mount Type, 10Wx10Lx3.8H		

Operating temperature is -40°C to +85°C.

1) OIP3 is measured with two tones at an output power of 0 dBm / tone separated by 1 MHz.

2) S11/S22 (max) is the worst value within the frequency band.



3) Switching time means the time that takes for output power to get stabilized to its final level after switching DC voltage from 0 V to V_s .

More Information

Website: www.asb.co.kr
E-mail: sales@asb.co.kr

Tel: (82) 42-528-7223
Fax: (82) 42-528-7222

Outline Drawing (Unit: mm)

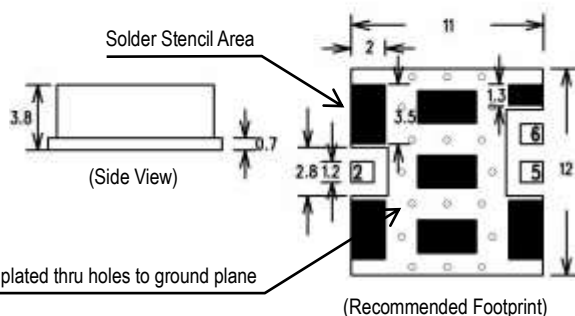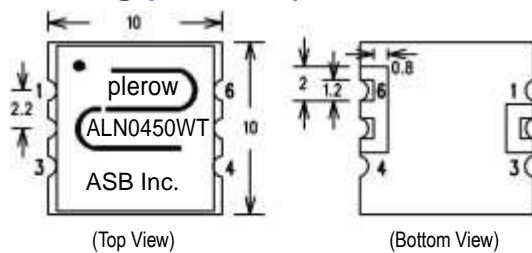


Pin Number	Function
2	RF In
5	RF Out
6	+Vcc
Others	Ground

- Note: 1. The number and size of ground via holes in a circuit board is critical for thermal RF grounding considerations.
2. We recommend that the ground via holes be placed on the bottom of all ground pins for better RF and thermal performance, as shown in the drawing at the left side.


Typical Performance
(Measured)

400~500 MHz
+5 V


S-parameters

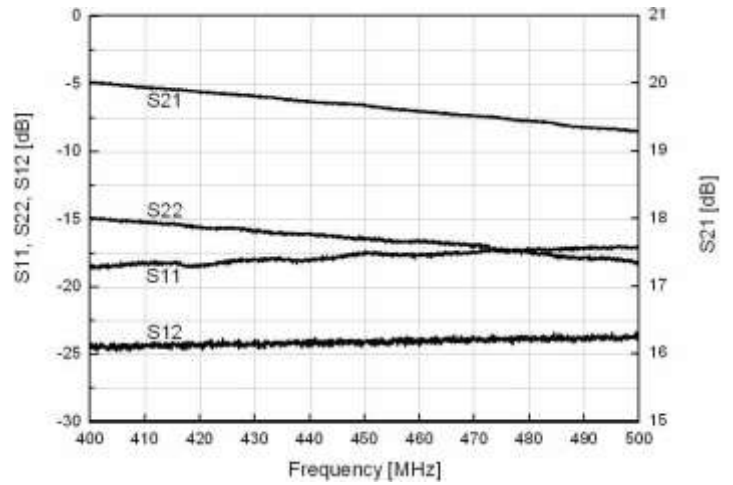


S-parameters & K Factor

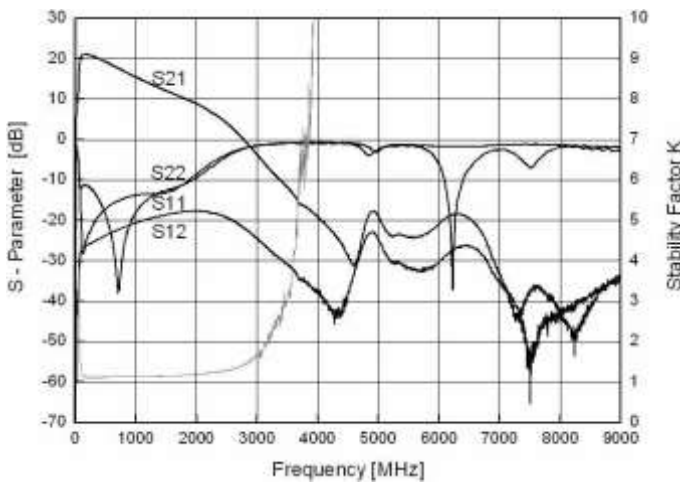


Noise Figure

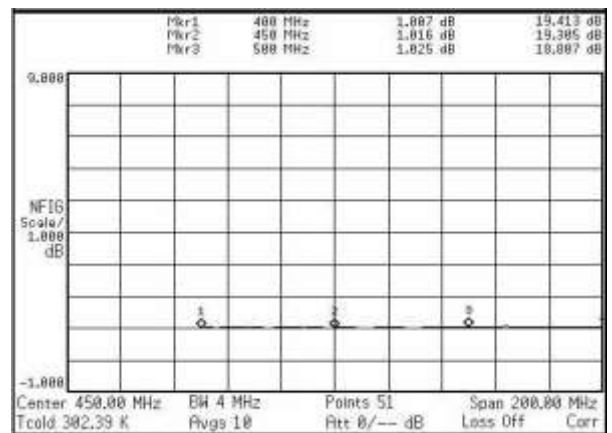

OIP3

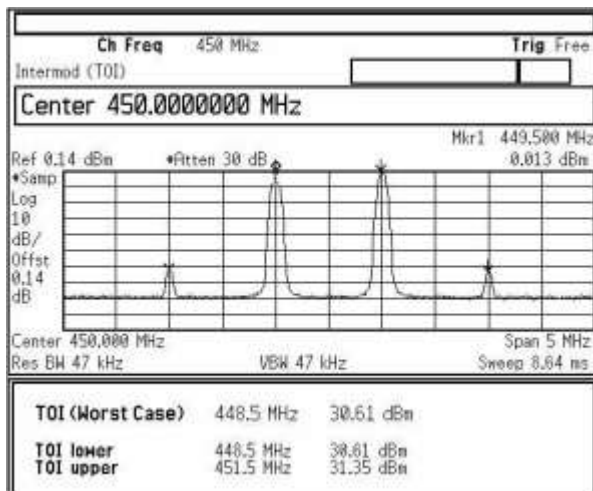

P1dB

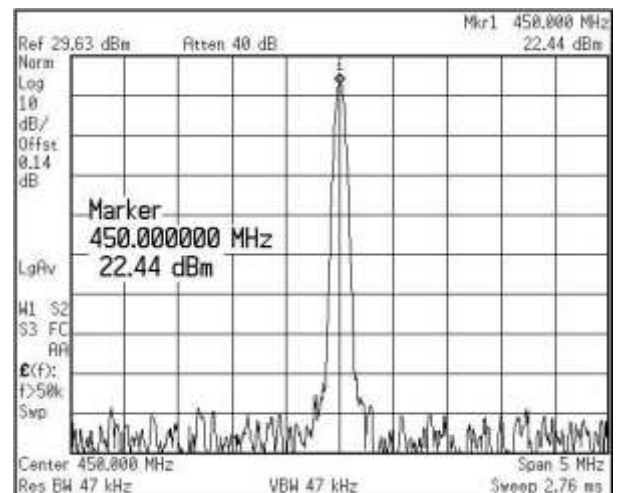


RF Performance with Voltage Change

Item Voltage	S11 (dB)	S22 (dB)	S21 (dB)	G/F (dB)	NF (dB)	P1dB (dBm)	OIP3 (dBm)	Current (mA)
4.5	-22.78	-19.53	18.92	0.67	1.099	21.49	25.28	24
4.6	-21.23	-18.26	19.07	0.68	1.077	21.68	26.35	27
4.7	-19.88	-17.13	19.23	0.70	1.050	21.91	27.54	30
4.8	-18.79	-16.21	19.38	0.70	1.045	22.08	28.48	34
4.9	-18.04	-15.60	19.48	0.71	1.038	22.27	29.64	37
5.0	-17.28	-15.00	19.60	0.72	1.025	22.44	30.61	42
5.1	-16.75	-14.57	19.70	0.72	1.030	22.65	31.43	46
5.2	-16.40	-14.30	19.76	0.74	1.031	22.82	32.16	50
5.3	-15.97	-13.98	19.85	0.74	1.035	23.04	32.81	55
5.4	-15.59	-13.71	19.93	0.76	1.041	23.26	33.35	60
5.5	-15.13	-13.44	20.05	0.76	1.049	23.47	33.88	66

RF Performance with Operating Temperature


Item Temp.	S11 (dB)	S22 (dB)	S21 (dB)	G/F (dB)	NF (dB)	P1dB (dBm)	OIP3 (dBm)	Current (mA)
-40°C	-17.63	-14.98	19.66	0.71	0.849	22.84	27.49	33
-20°C	-17.84	-15.11	19.70	0.72	0.884	22.78	28.45	35
0°C	-18.32	-15.42	19.66	0.73	0.978	22.64	29.32	37
25°C	-18.37	-15.44	19.82	0.74	1.038	22.21	30.32	40
40°C	-18.87	-15.74	19.82	0.74	1.098	22.05	30.73	42
60°C	-19.22	-15.98	19.83	0.77	1.158	21.53	31.39	45
80°C	-19.52	16.23	19.93	0.78	1.230	20.64	32.01	50
100°C	-19.94	-16.64	19.92	0.79	1.310	19.92	33.06	53

Application Circuit

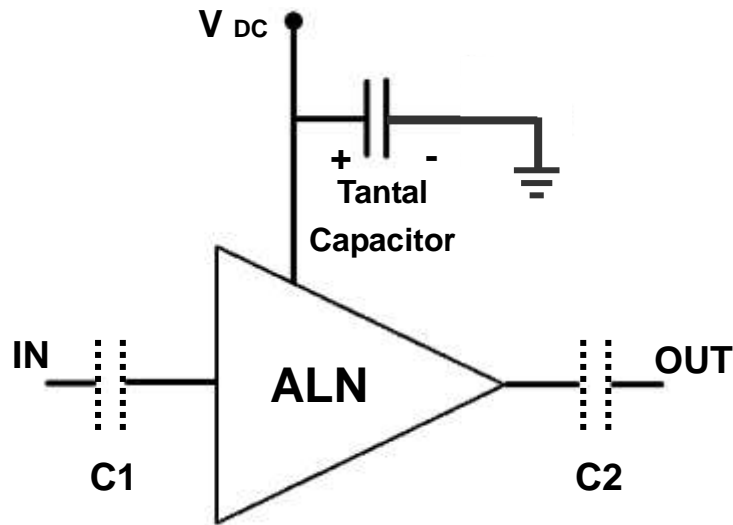


- 1) The tantal capacitor is optional and for bypassing the AC noise introduced from the DC supply. The capacitance value may be determined by customer's DC supply status.
- 2) So-called DC blocking capacitors are always necessarily placed at the input and output port for allowing only the RF signal to pass and blocking the DC component in the signal. The DC blocking capacitors are included inside the LNA module. Therefore, C1 & C2 capacitors may not be necessary, but can be added just in case that the customer wants. The value of C1 & C2 is determined by considering the application frequency.

Recommended Soldering Reflow Process

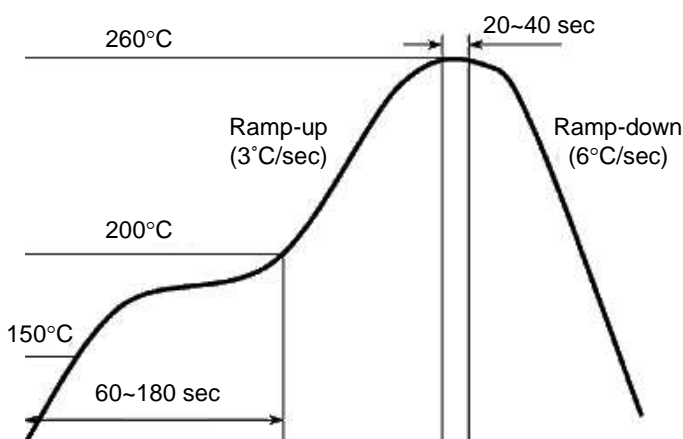

Evaluation Board Layout

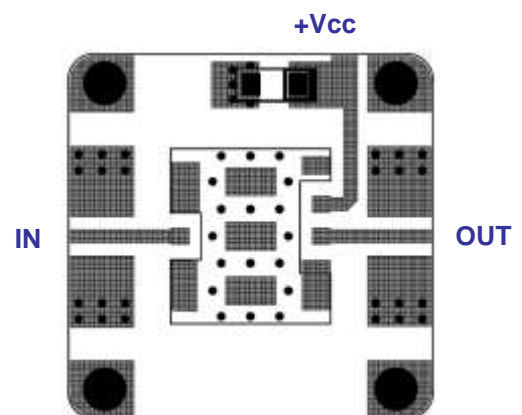

Size 25 x 25mm
(for ALN-AT, BT, T Series – 10x10mm)

Copyright ©2007-2017 ASB Inc. All rights reserved. Datasheet subject to change without notice. ASB assumes no responsibility for any errors which may appear in this datasheet. No part of the datasheet may be copied or reproduced in any form or by any means without the prior written consent of ASB.