

### Features

- $S_{21} = 25.2 \text{ dB @ 2300 MHz}$   
= 24.8 dB @ 2360 MHz
- NF of 0.75 dB over Frequency
- Unconditionally Stable
- Single 5V Supply
- High OIP3 @ Low Current

### Description

The plerow™ ALN-series is the compactly designed surface-mount module for the use of the LNA with or without the following gain blocks in the infrastructure equipment of the mobile wireless (CDMA, GSM, PCS, PHS, WCDMA, DMB, WLAN, WiBro, WiMAX), GPS, satellite communication terminals, CATV and so on. It has an exceptional performance of low noise figure, high gain, high OIP3, and low bias current. The stability factor is always kept more than unity over the application band in order to ensure its unconditionally stable implementation to the application system environment. The surface-mount module package including the completed matching circuit and other components necessary just in case allows very simple and convenient implementation onto the system board in mass production level.



### Specifications (in Production)

Typ. @ T = 25°C,  $V_s = 5 \text{ V}$ , Freq. = 2330 MHz,  $Z_{o.sys} = 50 \text{ ohm}$

Parameter	Unit	Specifications		
		Min	Typ	Max
Frequency Range	MHz	2300		2360
Gain	dB	24	25	
Gain Flatness	dB		± 0.2	± 0.5
Noise Figure	dB		0.75	0.80
Output IP3 <sup>(1)</sup>	dBm	35	36	
S11 / S22 <sup>(2)</sup>	dB			-18 / -10
Output P1dB	dBm	20	21	
Switching Time <sup>(3)</sup>	µsec		-	
Supply Current	mA		100	120
Supply Voltage	V		5	
Impedance	Ω		50	
Max. RF Input Power	dBm	C.W 29 ~ 31 (before fail)		
Package Type & Size	mm	Surface Mount Type, 13Wx13Lx3.8H		

### More Information

Website: [www.asb.co.kr](http://www.asb.co.kr)  
E-mail: [sales@asb.co.kr](mailto:sales@asb.co.kr)  
Tel: (82) 42-528-7223  
Fax: (82) 42-528-7222


Operating temperature is -40°C to +85°C.

1) OIP3 is measured with two tones at an output power of 5 dBm / tone separated by 1 MHz.

2) S11/S22 (max) is the worst value within the frequency band.

3) Switching time means the time that takes for output power to get stabilized to its final level after switching DC voltage from 0 V to  $V_s$ .

### Outline Drawing (Unit: mm)

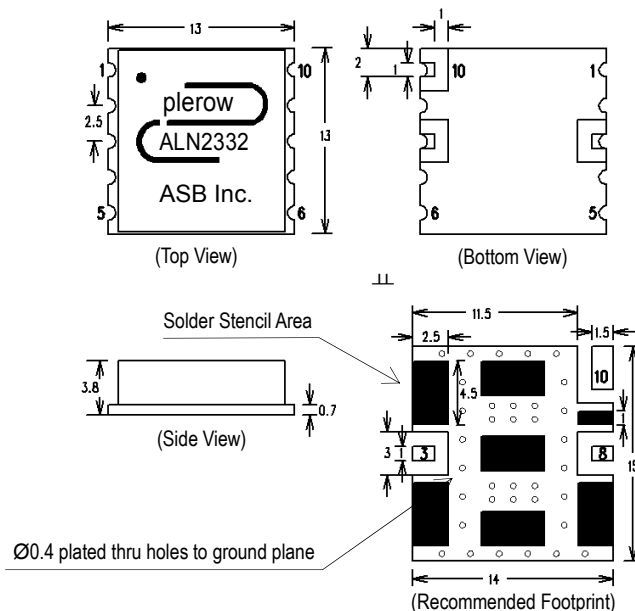

Pin Number	Function
3	RF In
8	RF Out
10	+Vcc
Others	Ground

- Note: 1. The number and size of ground via holes in a circuit board is critical for thermal RF grounding considerations.  
2. We recommend that the ground via holes be placed on the bottom of all ground pins for better RF and thermal performance, as shown in the drawing at the left side.

**Typical Performance  
(Measured)**


---

**2300~2360 MHz**


---

**+5 V**


**S-parameters**

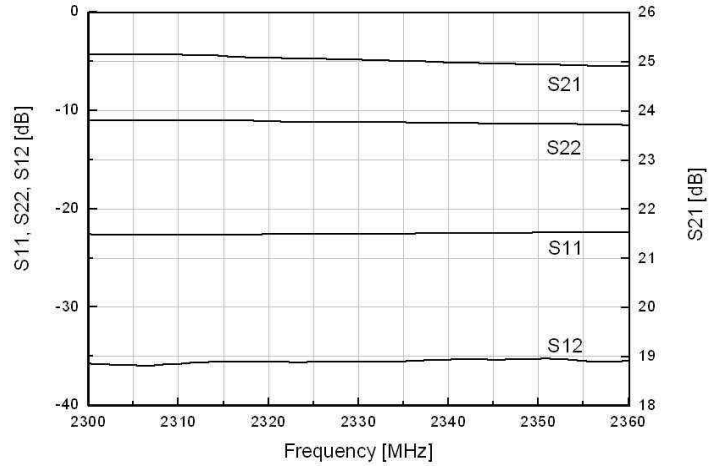


**S-parameters & K Factor**

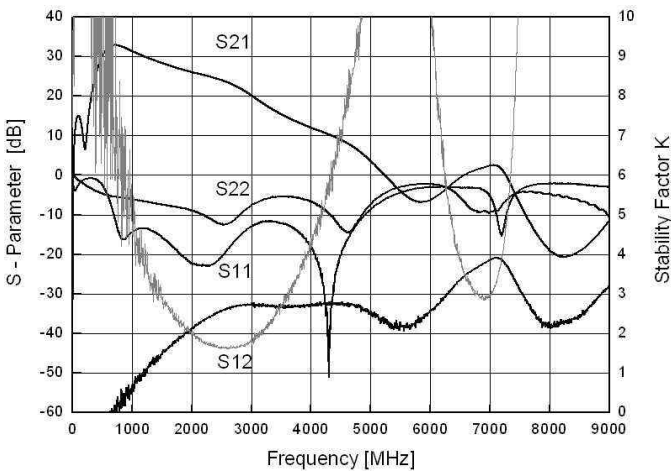


**Noise Figure**

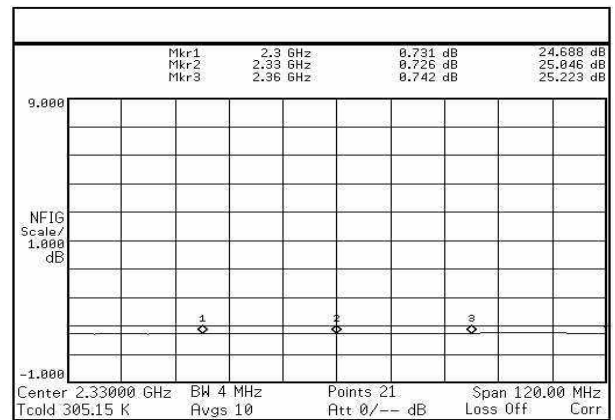

**OIP3**

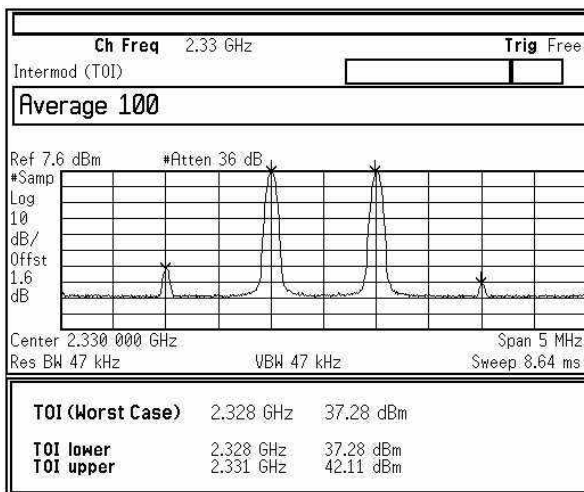

**P1dB**

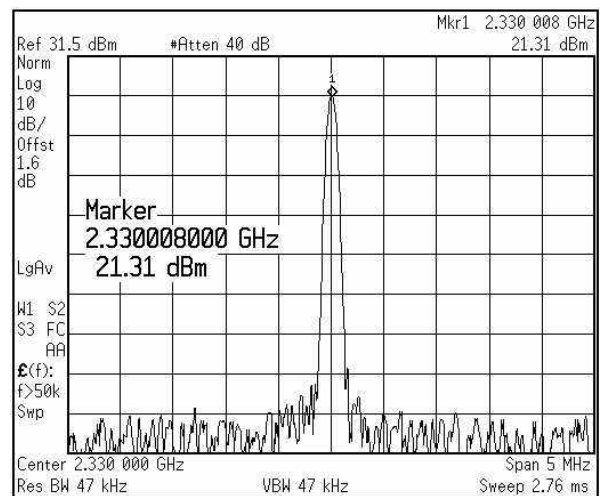

### RF Performance with Voltage Change

Item Voltage	S11 (dB)	S22 (dB)	S21 (dB)	G/F (dB)	NF (dB)	P1dB (dBm)	OIP3 (dBm)	Current (mA)
4.5	-23.59	-11.07	24.49	0.30	0.747	20.27	34.73	71
4.6	-24.44	-11.03	24.54	0.29	0.763	20.53	35.39	78
4.7	-25.02	-11.00	24.60	0.30	0.766	20.76	35.87	83
4.8	-25.95	-10.97	24.63	0.29	0.751	20.97	36.40	88
4.9	-26.63	-10.91	24.64	0.30	0.734	21.21	36.73	94
5.0	<b>-27.06</b>	<b>-10.94</b>	<b>24.70</b>	0.30	<b>0.735</b>	<b>21.48</b>	<b>36.88</b>	<b>99</b>
5.1	-27.57	-10.84	24.83	0.31	0.745	21.67	37.29	103
5.2	-28.33	-10.81	24.88	0.30	0.752	21.87	37.36	110
5.3	-28.76	-10.75	24.93	0.31	0.752	22.03	37.31	115
5.4	-29.41	-10.76	24.96	0.30	0.758	22.24	37.21	120
5.5	-30.15	-10.68	25.00	0.31	0.770	22.42	37.09	126

### RF Performance with Operating Temperature


Item Temp.	S11 (dB)	S22 (dB)	S21 (dB)	G/F (dB)	NF (dB)	P1dB (dBm)	OIP3 (dBm)	Current (mA)
-40°C	-28.89	-10.62	25.31	0.26	0.483	21.78	37.33	96
-20°C	-27.70	-10.72	25.19	0.28	0.558	21.89	37.16	97
0°C	-27.31	-10.67	25.12	0.26	0.641	21.71	37.06	99
25°C	<b>-26.39</b>	<b>-10.78</b>	<b>24.94</b>	<b>0.27</b>	<b>0.723</b>	<b>21.58</b>	<b>36.89</b>	<b>100</b>
40°C	-25.62	-10.77	24.80	0.28	0.770	21.50	36.68	101
60°C	-25.16	-10.74	24.61	0.28	0.886	21.32	36.29	102
80°C	-24.73	-10.63	24.41	0.28	1.059	21.00	35.56	102
100°C	-24.28	-10.63	24.20	0.27	1.147	20.68	34.62	101

### Application Circuit



- 1) The tantal capacitor is optional and for bypassing the AC noise introduced from the DC supply. The capacitance value may be determined by customer's DC supply status.
- 2) So-called DC blocking capacitors are always necessarily placed at the input and output port for allowing only the RF signal to pass and blocking the DC component in the signal. The DC blocking capacitors are included inside the LNA module. Therefore, C1 & C2 capacitors may not be necessary, but can be added just in case that the customer wants. The value of C1 & C2 is determined by considering the application frequency.

### Recommended Soldering Reflow Process

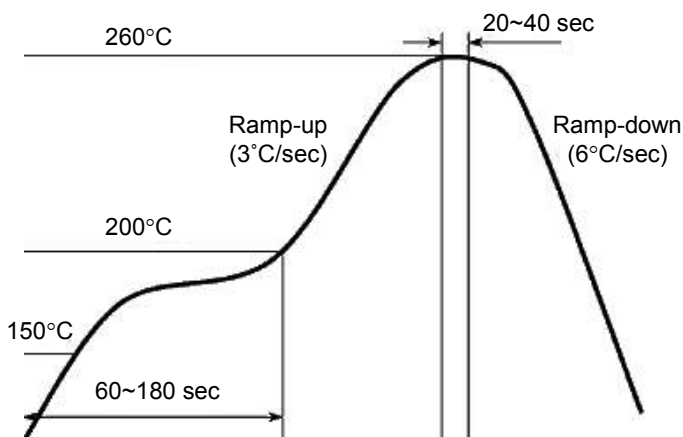

### Evaluation Board Layout

